

# A-1803

PA AMPLIFIER

Equipped with Priority function, Chime function, and 2 Zone selector switches, the A-1803 PA Amplifier of 30 W is designed to suit the following PA system applications: paging announcements, intercommunications, BGM, and broadcasting in schools, offices, and shops. It's power remote control function, provided especially for use in conjunction with the P-1812 (optional), will turn ON or OFF the P-1812's power.




Article number:A-1803 UK  
Alternative products: A-1806, A-1812

## Specifications


Power source	220 - 230 V AC, 50 / 60 Hz
Rated output	30 W
Frequency response	50 Hz - 20 kHz (±3 dB)
Distortion	< 2 % (at 1 kHz, rated power)
Current consumption	2 A
S/N ratio	100 dB (MIC: > 60 dB; AUX : > 76 dB; Tel: > 90 dB, EMERGENCY: > 96 dB)
Number of channels	1
Connectable microphones	3
Inputs	MIC 1: -60 dBV, 600 Ω, balanced, combined XLR phone jack or 5p DIN socket MIC 2 & MIC 3: -60 dBV, 600 Ω, balanced, combined XLR phone jack AUX 1-2: -20 dBV, 10 kΩ, unbal. RCA AUX 3: -20 dBV, 10 kΩ, unbal. combined XLR phone jack
Control input	TEL: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 5 mA or less, M3 screw terminal EMERGENCY: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 10 mA or less, M3 screw terminal
Outputs	REC: 0 dBV, 600 Ω, unbalanced, RCA pin jack SPEAKER: 100 V (330 Ω), 4 – 16 Ω
Dimensions (W x H x D)	420 x 107,7 x 367 mm
Dimensions (ø x D)	x 367 mm
Finish	ABS resin, Steel plate, hairline, black,

Appearance

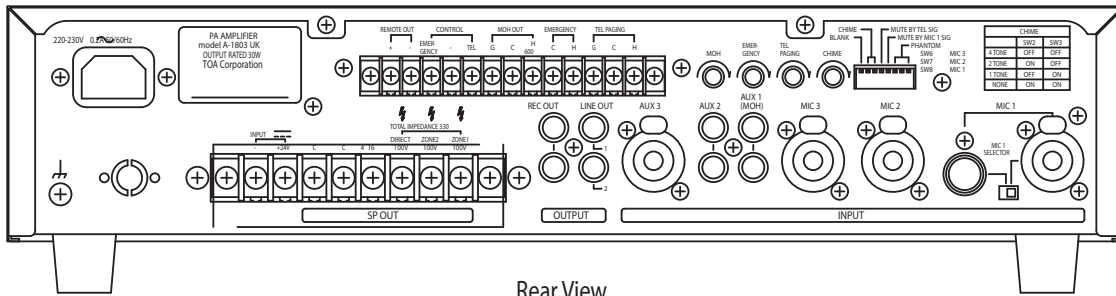

Rear View


420 [16.54"]

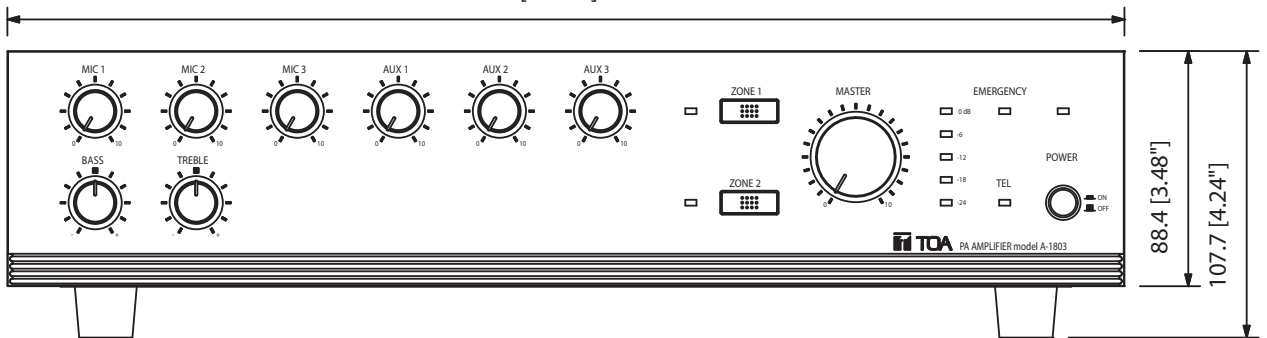

Front View

88.4 [3.48"]

107.7 [4.24"]

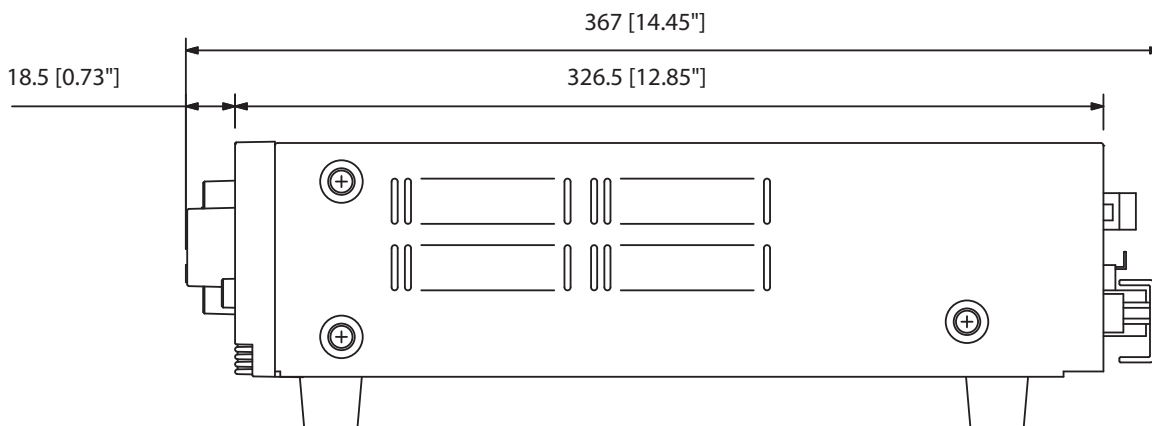

Side View

367 [14.45"]

326.5 [12.85"]

18.5 [0.73"]

UNIT:mm

SCALE:1/3