

PC-2360

El PC-2360 es adecuado para anuncios y el uso del sistema BGM en alta calidad de sonido. El diseño del altavoz armoniza con la arquitectura y la decoración modernas.




Número de artículo:PC-2360

Specifications

Sensibilidad (1 W, 1 m) (combinado)	94 dB SPL
Respuesta de frecuencia	60 Hz - 20 kHz
Selección de potencia	6/3/1,5/0,8 W (100V) 3/1,5/0,8/0,4 W (70V)
Componente de altavoz	16 cm tipo cono
Acabado	blanco tráfico (RAL 9016 o equivalente),
Temperatura de funcionamiento	-10 °C hasta +50 °C

Appearance



CEILING MOUNT SPEAKER 6INCH 6W

PC-2360


DESCRIPTION


The PC-2360 Ceiling Mount Speaker is of all metallic construction and ideal for use in a voice alarm system or BGM system. It feature spring clamp mechanism for easy mounting to the ceiling. The input impedance can be easily changed by changing the tap position of the transformer. The push-in type input terminal block makes cable connection easy and allow bridge wiring.

SPECIFICATIONS


Rated Input	6 W (100 V line), 3 W (70 V line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	60 Hz - 20 kHz (peak -20 dB)
Speaker Component	16 cm (6") cone-type
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Dimensions for Fixing Hole	Mounting hole: $\phi 200 \pm 3$ mm (7.87" \pm 0.12") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring clamp
Applicable Cable	Solid wire: 0.5 - 3 mm ² (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal-2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	$\phi 230 \times 76$ (D) mm (9.06" \times 2.99")
Weight	740 g (1.63 lb)
Accessory	Paper pattern -1


APPEARANCE

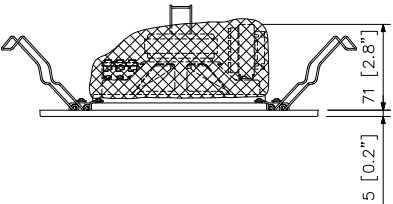

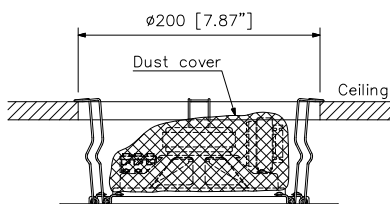

Mounting Diagram

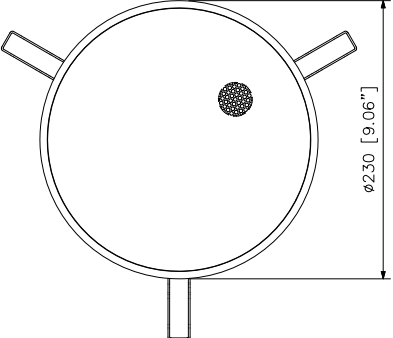

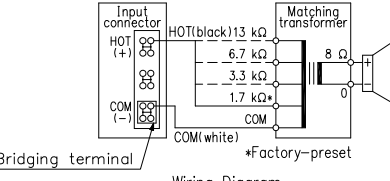

Wiring Diagram

*Factory-preset

Note: Use transformer terminals when changing input impedance.

UNIT:mm SCALE:1/4