

Input Module for VP-2000 and BGM

VP-200VX-BGM


DESCRIPTION

The input module is designed to mix the Audio signal of the VX-2000 system with an Audio signal of an additional input. The latter can be muted by a control input, and supports a balanced mono or unbalanced stereo Audio signal. Its level can be adjusted. All surveillance functions of the VX-2000 system will be supported.

INSTALLATION AND SETTING


This module will be installed similar to the VP-200VX module. Before installation, the wire jumper J1 must be cut or not depending on the required input sensitivity, and the jumper JP1 must be set for balanced or unbalanced stereo input (see below).

sensitivity: -10 dBV (320 mV): do not cut jumper J1
 0 dBV (1V): cut jumper J1

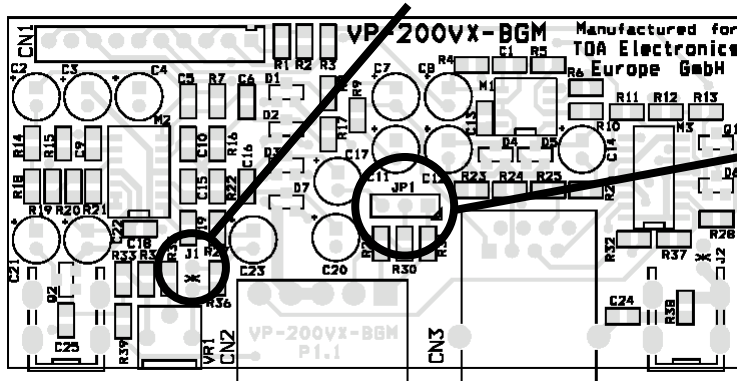

external input: set jumper JP1:
 right position (mark at the jumper): unbalanced stereo
 left position: balanced

CONNECTION

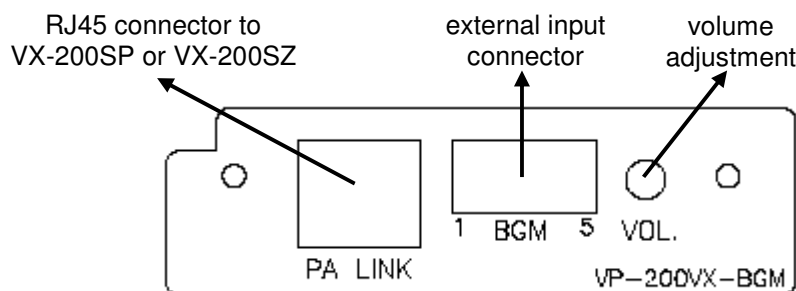

External Input Contacts:

Pin	1	2	3	4	5
Stereo (unbalanced)	left ch. (H)	right ch. (H)	shield	ground (E)	control input (Mute BGM)
balanced	H	C	E (shield)		