



AT-4000 Series Attenuators



**Ergonomically designed
with precision control.**


AT-4000 Series

Attenuators

Design with ergonomics for the human hand in mind, AT-4000 Series Attenuators' control knob comes in a size that provides comfortable grip and excellent control with every turn. Consisting of 8-step attenuation, the series is built to provide precision volume control with a difference of 3 dB in every step. The built-in overriding relay feature allows emergency paging which is indicated by the LED light when activated. AT-4000 Series Attenuators come in 5 different ratings: 12 W, 30 W, 60 W, 120 W and 200W.

Features

- > 8-step attenuation level control (+/-3 dB)
- > Ergonomic control knob with better grip for easy turn
- > 24 VDC overriding relay with red LED indicator
- > Terminal block for thicker diameter cable
- > Clip-on face plate
- > 2- / 3- / 4-wire system
- > Surface or flush mount
- > Glossy finish in white

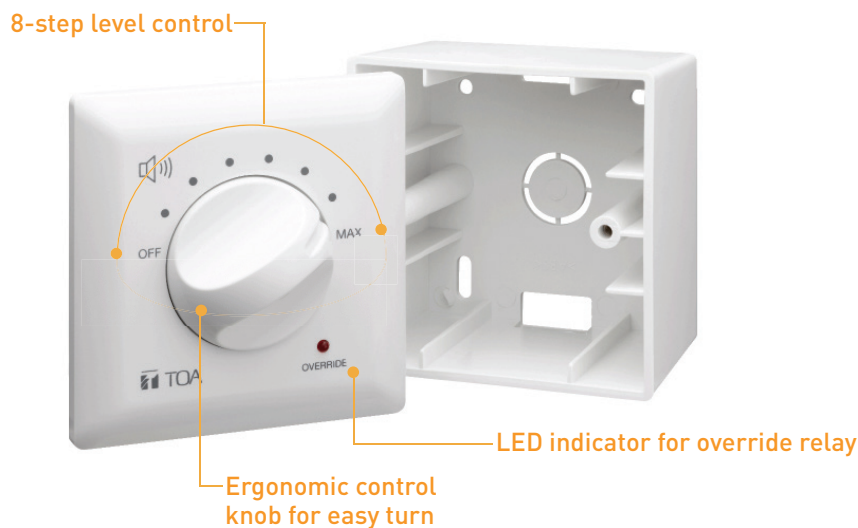

| Specifications | AT-4012B-EB | AT-4030B-EB | AT-4060B-EB | AT-4120B-EB | AT-4200B-EB |
|------------------------|--|-----------------|-------------|-------------|-------------|
| Input Capacity | 12W | 30 W | 60W | 120W | 200W |
| Attenuation | 8 steps (0 dB, -3 dB, 6 dB, 9 dB, 12 dB, 15 dB, 18 dB, OFF) | | | | |
| Override Indicator | Red LED (4-wire connection only) | | | | |
| Overriding Voltage | 24 V, 11 mA DC (4-wire connection only) | | | | |
| Terminal | Screw-type x 5 | | | | |
| Usable Cable | Cable range 22 - 14 AWG | | | | |
| Finish | Knob, Cover Panel: ABS Resin, White (RAL9016 or equivalent) / Front Panel: Surface treated steel plate | | | | |
| Dimensions (W x H x D) | 86 x 86 x 24 mm | 86 x 86 x 51 mm | | | |
| Weight | 120 g | 450 g | 460 g | 480 g | 490 g |
| Accessories | - Back box 85.5(W) x 86(H) x 51 (D) mm x 1, Plate mounting screw x 2 | | | | |

TOA Electronics Europe GmbH
www.toa.eu

Specifications are subject to change without notice.
Printed in Germany (1609) L833TEEC287 QJ