

BS-301 Compact satellite speaker system can produce effective acoustic sounds in commercial spaces like restaurants, cafés and retail stores. There are 4 small satellite speakers that conform to the design of the commercial space and can be installed using metal fittings attachments to produce suitable acoustic sounds even in complex spaces. The subwoofer, which can be temporarily or permanent installed, are capable of reinforcing the projection of ideal sounds.




Article number:BS-301B
Alternative products: BS-301W

Specifications

Sensitivity (1#W, 1#m)	81 dB x 2 channels
Frequency response.	40 Hz - 20 kHz (x 2 channels)
Rated input (low impedance)	Continuous program: 160 W x 2 channels Continuous pink noise: 80 W x 2 channels Measured in a set configuration of a subwoofer (L or R channel) and 2 satellite speakers
Rated impedance	4 Ω
Speaker component	Subwoofer: 16 cm cone-type x 2 channels, 210 (W) x 390 (H) x 563 (D) Satellite Speaker: 8 cm cone-type x 2 channels, 92 (W) x 97.5 (H) x 100 (D)
Finish.	HIPS resin, paint, black (RAL 9011 or equivalent),

Appearance

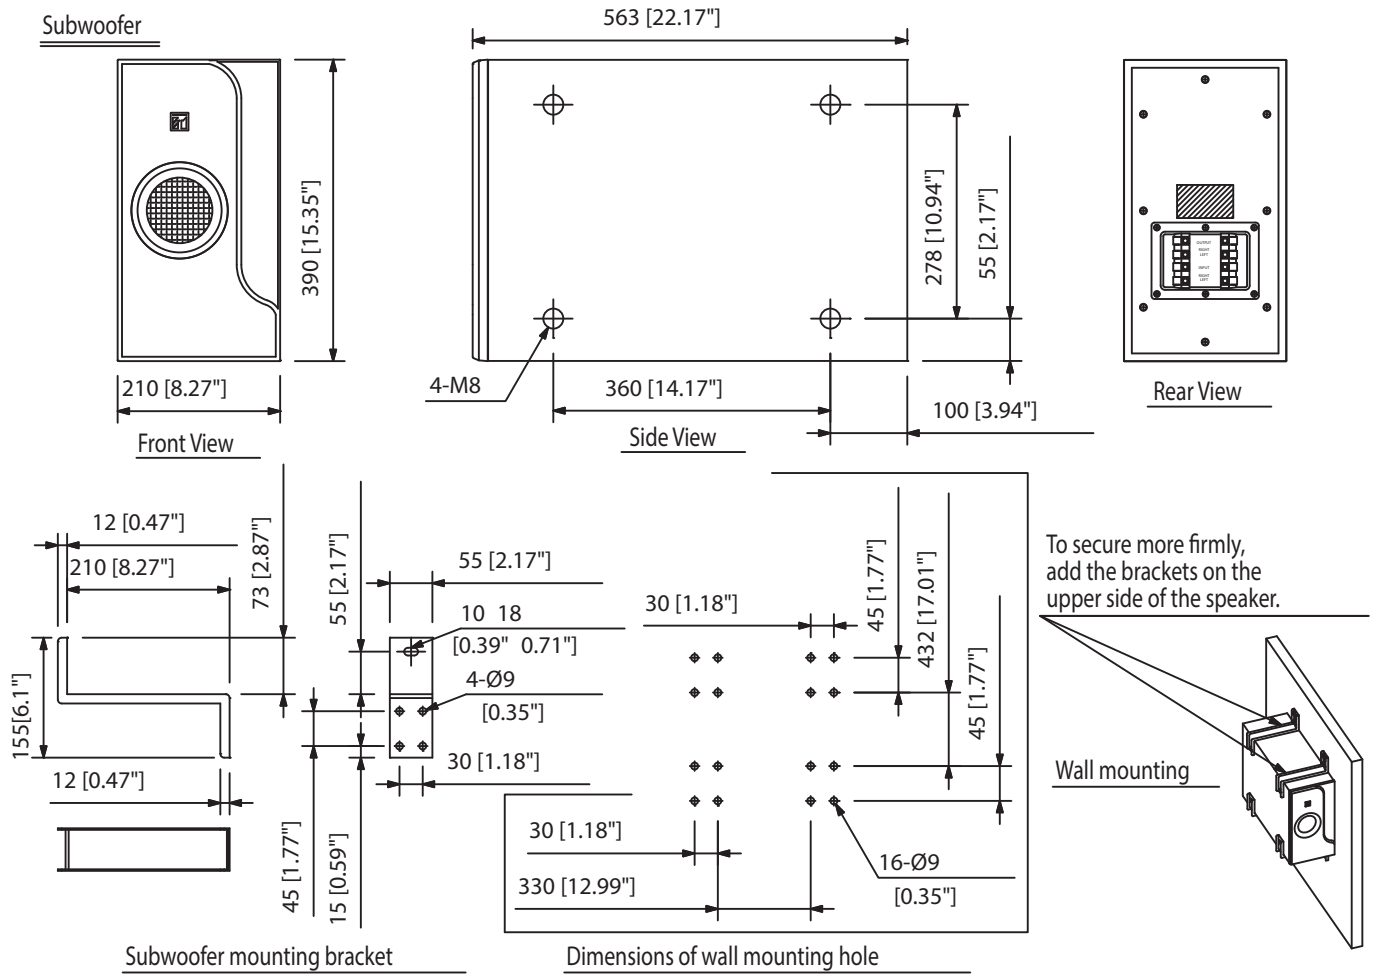

UNIT:mm SCALE:1/10

Note: Screw to mount the bracket are not provided.