


## DESCRIPTION

The D-981 is a remote control module designed for use with the D-901 Digital Mixer, etc. It permits preset memory recall, input/output channel volume control, stereo input selection and channel ON/OFF operation to be remotely controlled from external equipment. Tally output can also be provided for external control.

## SPECIFICATIONS

Contact Input	COM + Terminals 1 - 8: Open voltage: 5 V DC, short-circuit current: 5 mA removable terminal block (10 pins)
Control	
Preset Memory Selection	Any preset memory can be recalled. Control method: No-voltage make of 100 ms or more/ no-voltage make single pulse of 100 ms or more
Volume Control	Any input/output channel volume can be turned UP or Down. Control method: 1 step variation for no-voltage make single pulse of 100 ms or more 1 step continuous operation for every 70 ms for no-voltage make of 100 ms or more. Can be reset when at break. Variable range : $-\infty$ dB to +10 dB
Channel	Any input/output channel can be turned ON and OFF. Control method: No-voltage make of 100 ms or more/ no-voltage make single pulse of 100 ms or more
Stereo Selection	Input channel lines of the D-936R (optional) (4 stereo input module) can be selected. Control method: No-voltage make of 100 ms or more/ No-voltage make single pulse of 100 ms or more
Contact Output	COM + Terminals 1 - 8: No-voltage make contact input, contact capacity: 24 V DC, 100 mA removable terminal block (10 pins)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) X 119.5 (H) X 178.4 (D) mm
Weight	125 g
Accessory	Removable terminal plug (10 pins, preinstalled on the unit) ...2

## APPEARANCE

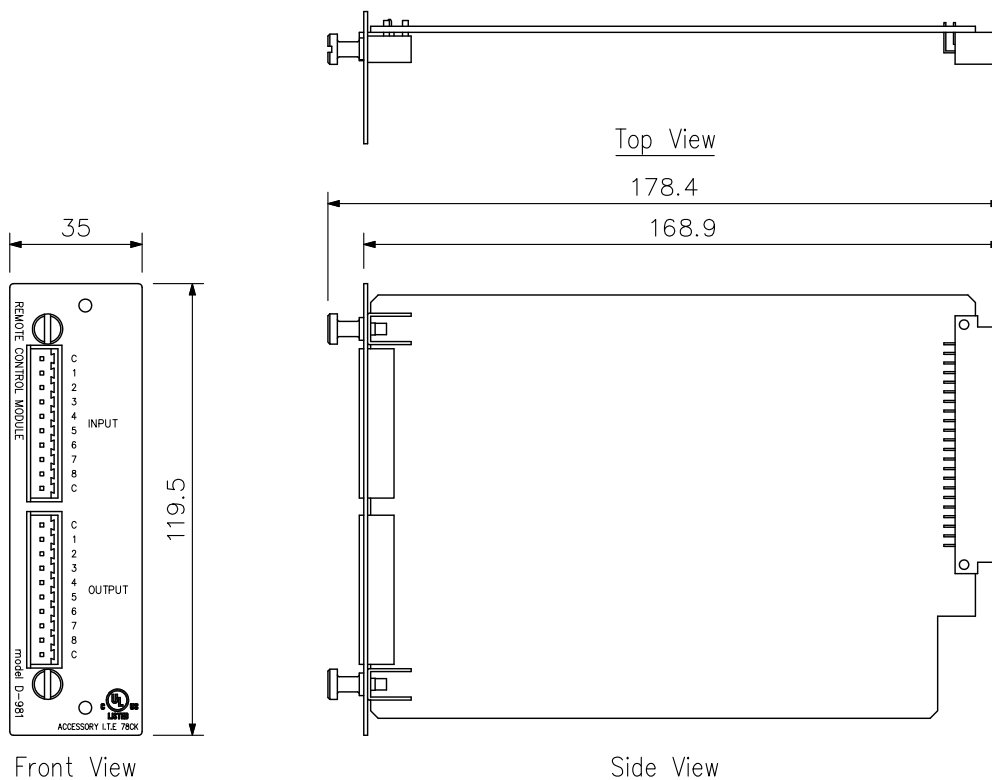

UNIT: mm SCALE: 1/2