

Thank you for purchasing TOA's Dynamic Microphone.

Please carefully follow the instructions in this manual to ensure long, trouble-free use of your equipment.


1. GENERAL DESCRIPTION

The DM-880-EB is a professional, low input impedance, hyper-cardioid and hand held dynamic microphone.


The microphone is suitable for general use and vocal application.

The microphone body is rigidly constructed of metal die-cast and designed to reduce switching and handling noise.

2. APPEARANCE

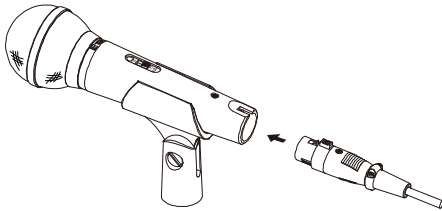

3. CIRCUIT DIAGRAM

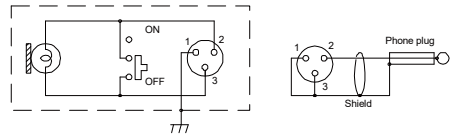

4. SPECIFICATIONS

Type	Moving coil microphone
Directivity	Hyper-cardioid
Frequency Response	70 – 17,000 Hz
Sensitivity	-52 dB \pm 3 dB (0 dB=1V/Pa, 1kHz)
Rated Impedance	250 Ω , balanced
Talk Switch	Short-off circuit type, slide switch
Terminal	XLR-3 type
Finish	Body: Die-cast zinc, painted black Head: Steel wire, painted black
Dimensions	Φ 54 x 174mm (without connection cable)
Weight	344 g (without connection cable)
Accessories	Connection cable (XLR female – phone plug, unbalanced, 5m) ...1 Microphone holder (5/8") ...1

Traceability Information for Europe

Manufacturer:

TOA Corporation
7-2-1, Minatojima-Nakamachi, Chuo-ku, Kobe, Hyogo,
Japan

Authorized representative:

TOA Electronics Europe GmbH
Suederstrasse 282, 20537 Hamburg, Germany
URL: www.toa.de