

SPECIFICATIONS

Diversity Reception	AC mains (supplied AC-DC adapter must be used)
Frequency Range	506 - 937.5 MHz (*1), UHF
Channel Selectable	Up to 16 channels (depending on region)
Sensitivity	10uV at 45dBA S/N
Squelch(SQ)	Tone SQ,Carrier SQ,Noise SQ
Audio Frequency Response	50 - 15000Hz
Audio Output Level (Maximum)	S4.10-RX2 Balanced (XLR socket) : 16dBu Un-balanced (1/4" jack socket) : 10dBu
Power Supply	11-18 VDC 500mA
Dimensions	210(W) x 44(H) x 202(D) mm (excluding antenna and BNC)
Weight	670g


(*1)

Band	Frequency
B	720 - 758 MHz, UHF
C	785 - 832 MHz, UHF
D	836 - 867 MHz, UHF
F	638 - 671 MHz, UHF
G	603 - 638 MHz, UHF
H	576 - 603 MHz, UHF
K	925 - 937.5 MHz, UHF


(*2)

Version	AC Adapter
G (UK)	220 - 230 V AC , 50Hz
E (ER)	230 V AC , 50Hz
T (US)	120 V AC , 50Hz
A (AS)	240 V AC , 50Hz
R (US)	120 V AC , 60Hz
C (CH)	220 V AC , 50Hz


APPEARANCE

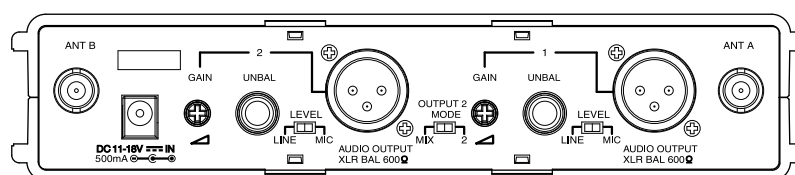

Rear View

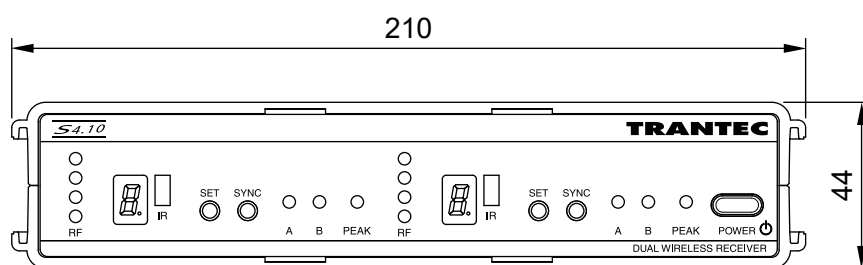

Front View

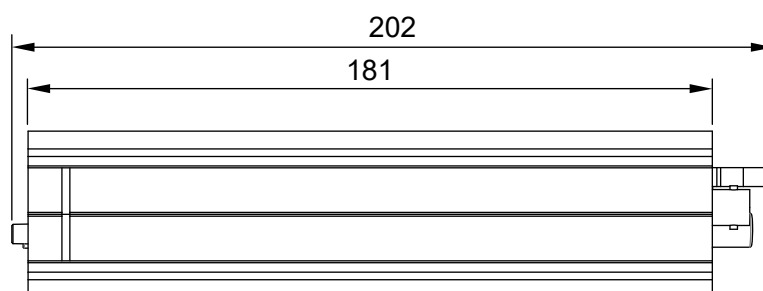

SideView