

# SR-H2L

## LINE ARRAY SPEAKER

The straight SR-H2L Line array speaker forms a line sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.




Article number:SR-H2L  
Alternative products: SR-H2S, SR-H3L, SR-H3S

### Specifications

Frequency response	80 Hz - 18 kHz
Sensitivity (1#V, 1#m)	92 dB
Rated Input (Low Impedance)	Continuous program: 180 W
Rated impedance	8 Ω
Connection	Removable input connector
Speaker component	7 cm cone-type x 9
Certificates	Ease
Dimensions	84 x 668.4 x 115 mm (W x H x D)
Gross weight	5,18 KG
Finish	MDF, paint, off-white (RAL 9010 or equivalent),
Weight	4.4 kg

Appearance

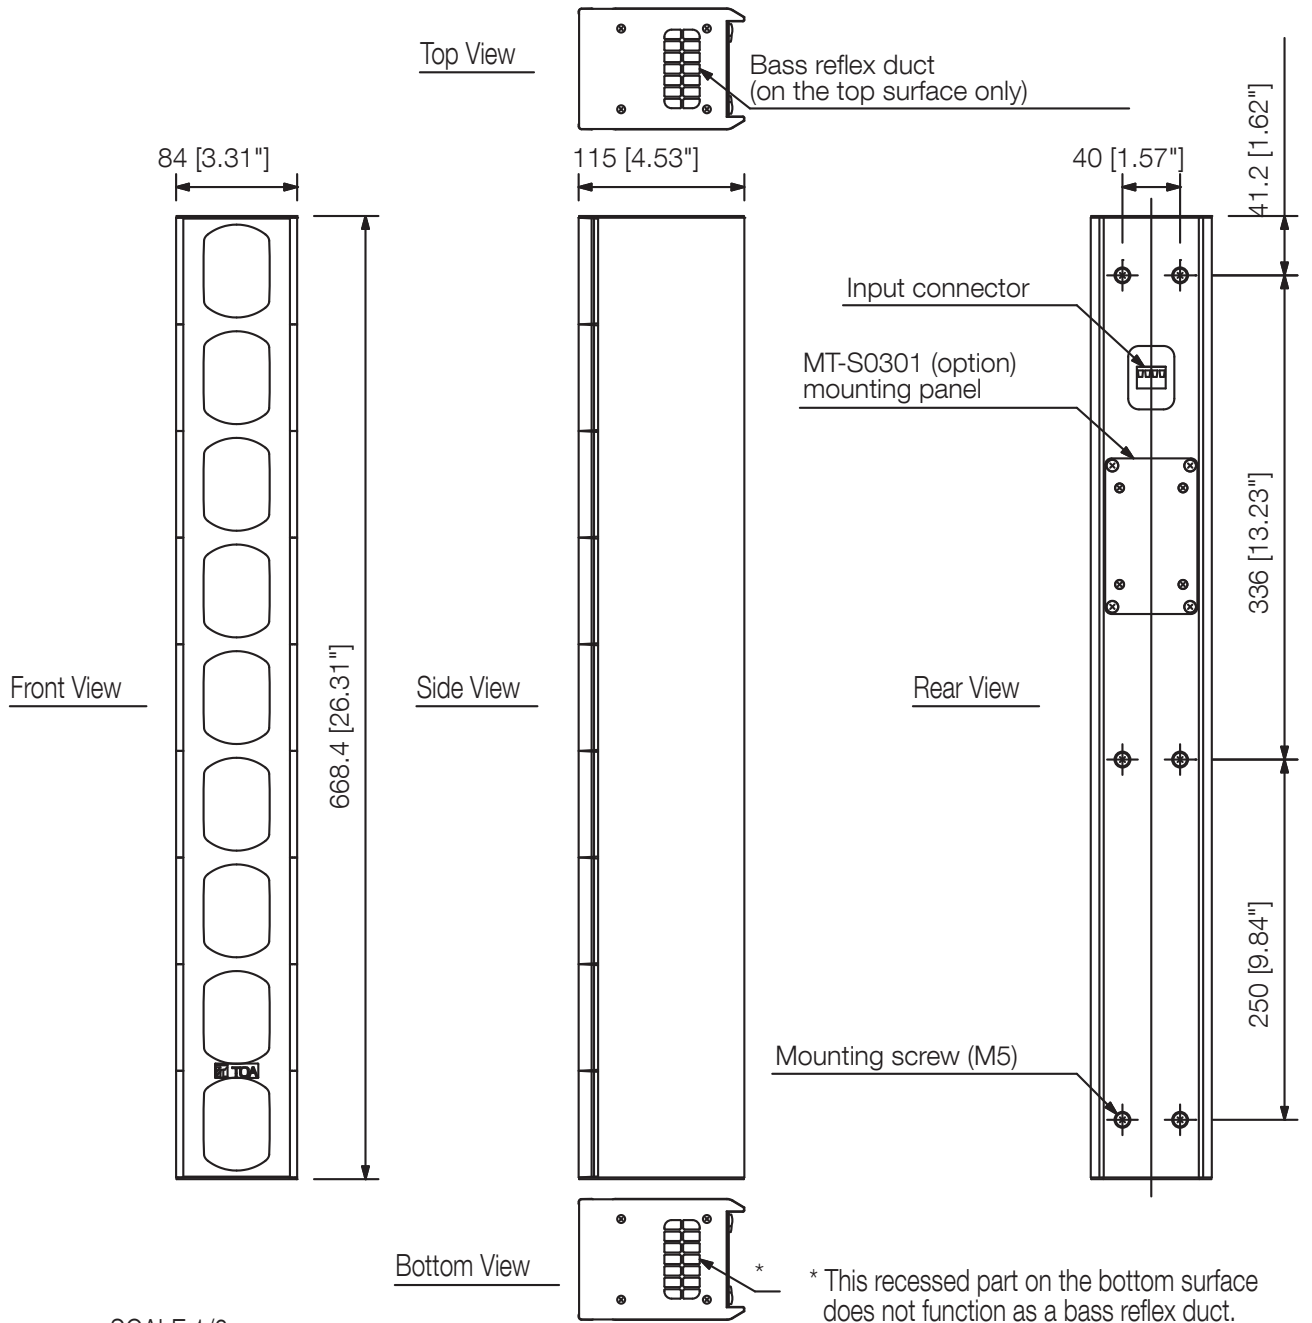

UNIT:mm

SCALE:1/6