

SR-H2L

LINE ARRAY SPEAKER

The straight SR-H2L Line array speaker forms a line sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.




Article number:SR-H2L
 Alternative products: SR-H2S, SR-H3L, SR-H3S

Specifications

Sensitivity (1#V, 1#m)	92 dB
Frequency response.	80 Hz - 18 kHz
Rated input (low impedance)	Continuous program: 180 W
Rated impedance	8 Ω
Speaker component	7 cm cone-type x 9
Finish.	MDF, paint, off-white (RAL 9010 or equivalent),

Appearance

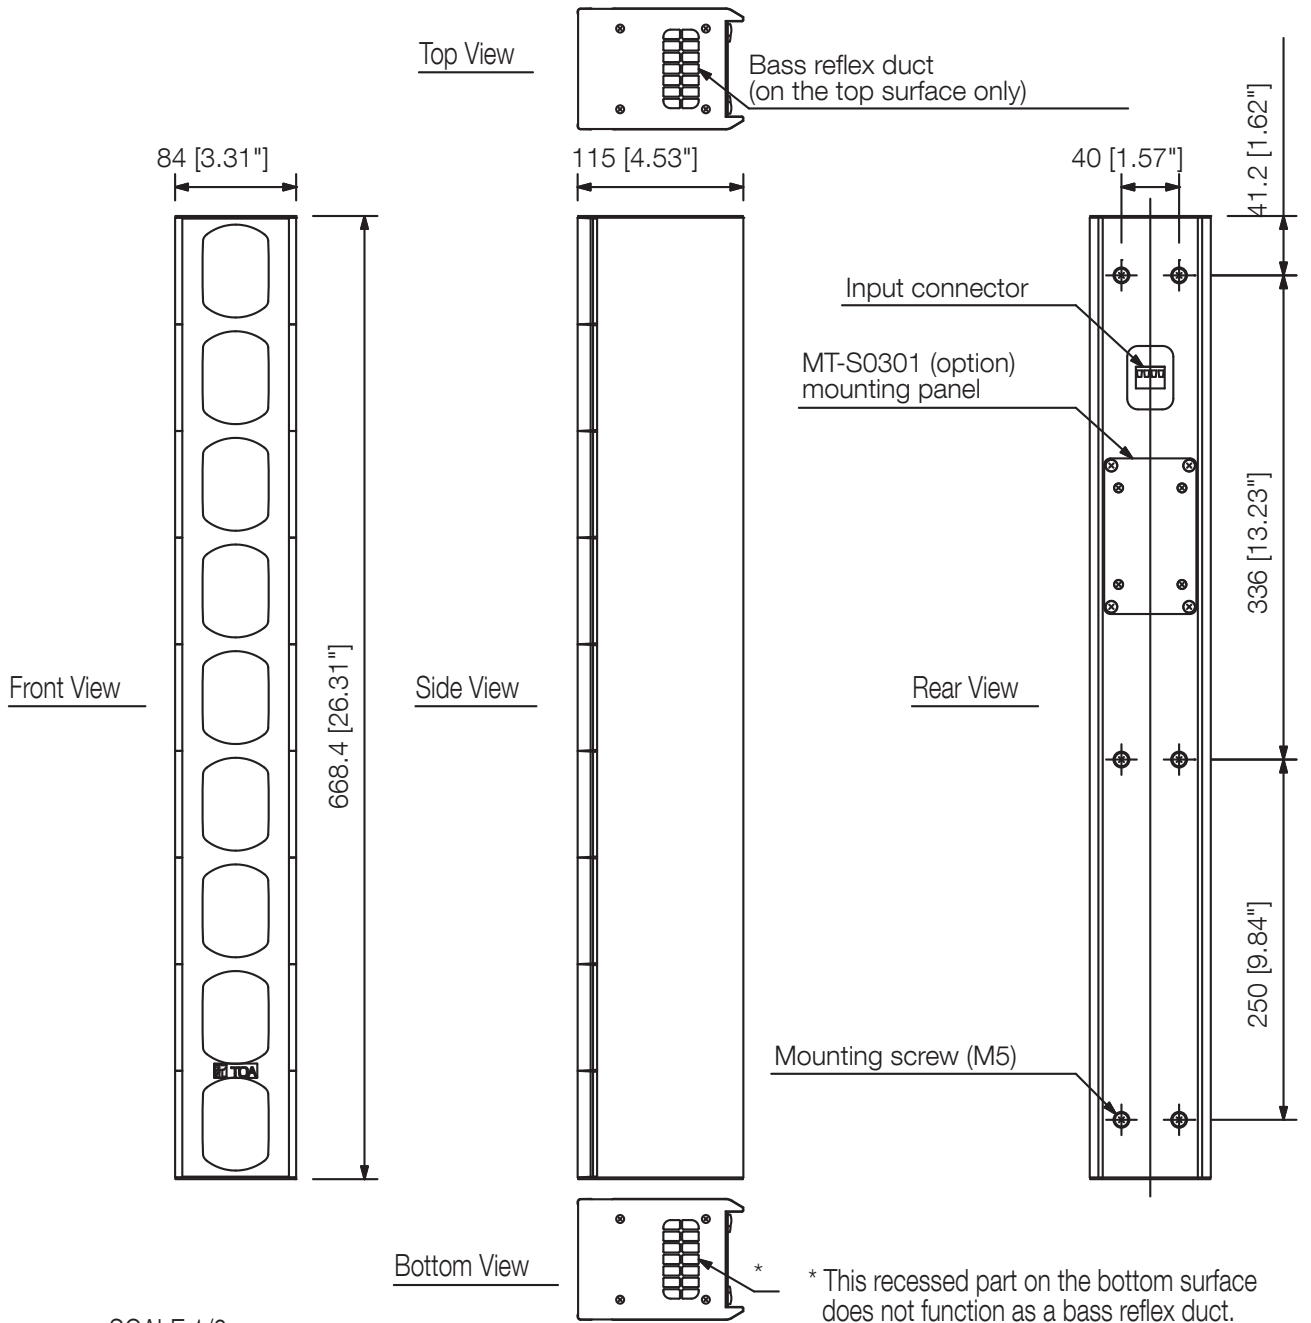

UNIT:mm

SCALE:1/6