

SR-H3L

LINE ARRAY SPEAKER

The straight SR-H3L Line array speaker forms a line sound source by the internal speaker units arrayed vertically in close proximity. It can be used for high-impedance applications with the installation of the optional MT-S0301 Matching transformer.




Article number:SR-H3L
Alternative products: SR-H2L, SR-H3L, SR-H3S

Specifications

Sensitivity (1#V, 1#m)	95 dB
Frequency response.	110 Hz - 18 kHz
Rated input (low impedance)	Continuous program: 360 W
Rated impedance	8 Ω
Speaker component	7 cm cone-type x 16
Finish.	MDF, paint, off-white (RAL 9010 or equivalent),

Appearance

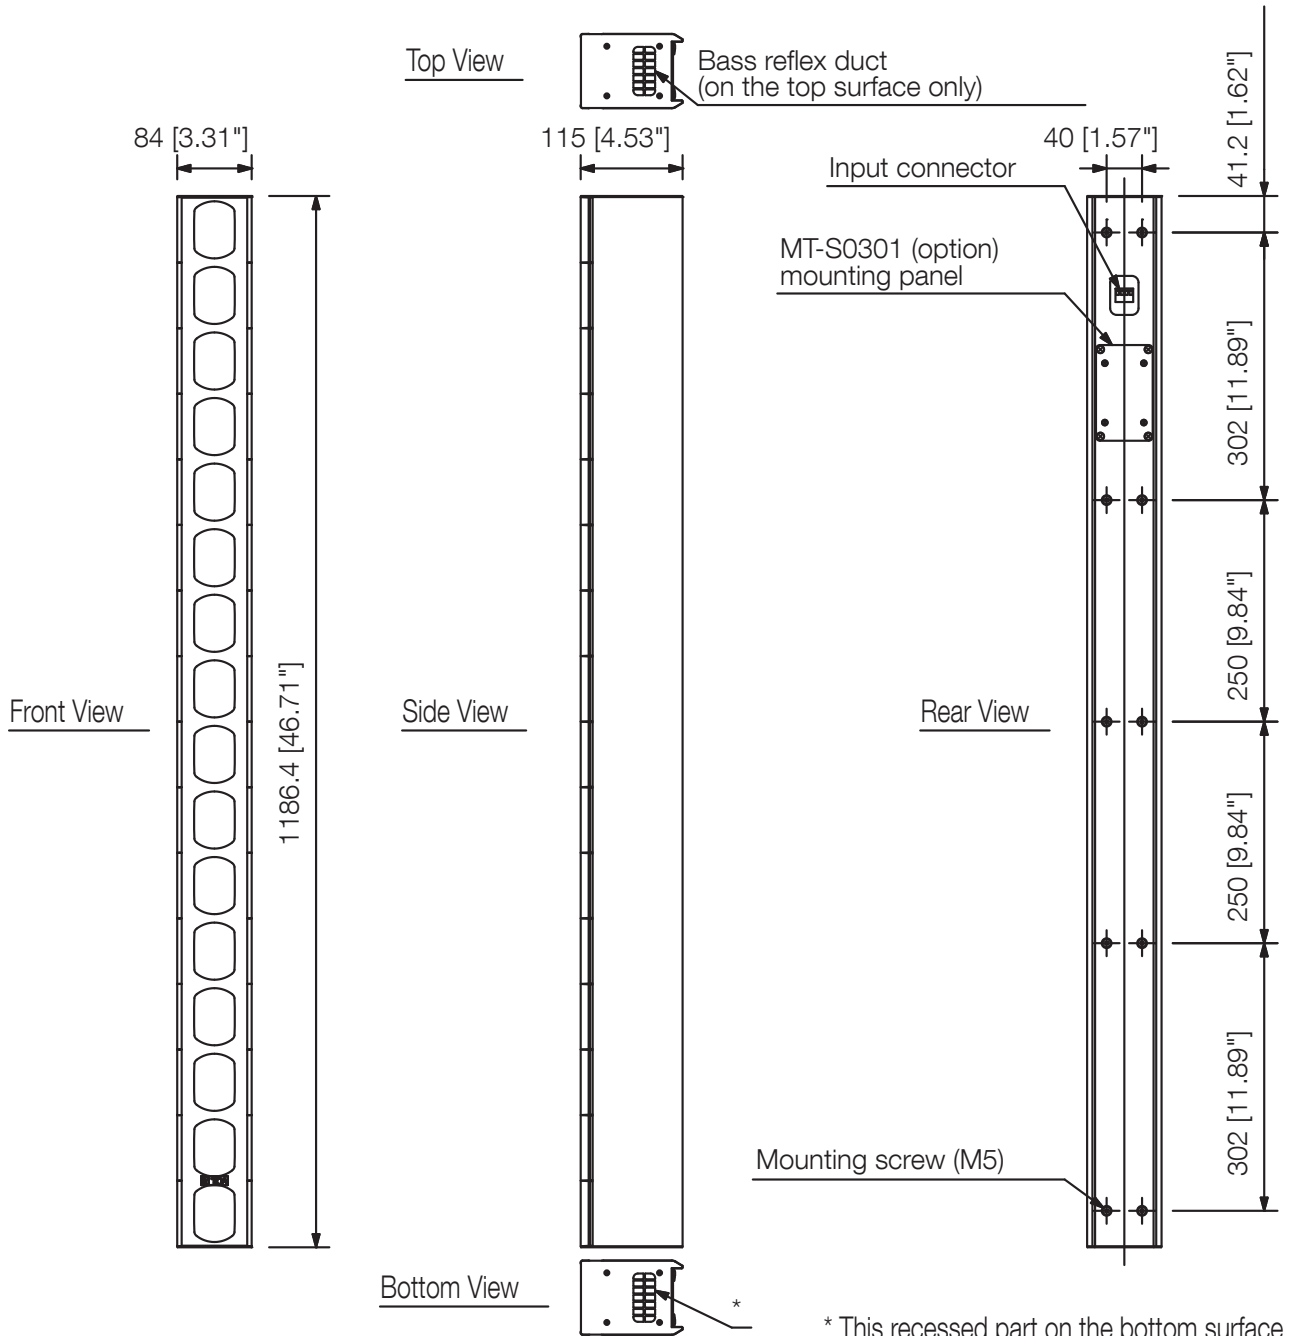

* This recessed part on the bottom surface does not function as a bass reflex duct.

UNIT:mm

SCALE:1/10