

SR-S4L

LINE ARRAY SPEAKER

The SR-S4L is a two-way line array speaker ideal for long distance sound transmission and configures a line array by arranging speaker elements vertically close to each other. It can be converted into the bi-amplifier drive system by changing the internal connection. It can be used for high-impedance applications with the installation of the optional MT-S0601 Matching transformer.



Article number:SR-S4L
Alternative products: SR-S4LWP, SR-S4LEB-Q


Specifications

Frequency response	70 Hz - 20 kHz
Sensitivity (1#V, 1#m)	94 dB
Rated Input (Low Impedance)	Continuous program: 600 W
Rated impedance	8 Ω
Connection	M5 screw terminal, distance between barriers: 12.2 mm and Neutrik NL4MP x 2 (usable cable connector: Neutrik NL4FC)
Speaker component	Low frequency: 10 cm cone-type x 8, High frequency: 2.5 cm balanced dome-type x 24
Certificates	Ease
Dimensions	160 x 895 x 255 mm (W x H x D)
Gross weight	19,5 KG
Finish	MDF, paint, off-white (RAL 9010 or equivalent),
Weight	16 kg

SR-S4L

LINE ARRAY SPEAKER

Appearance

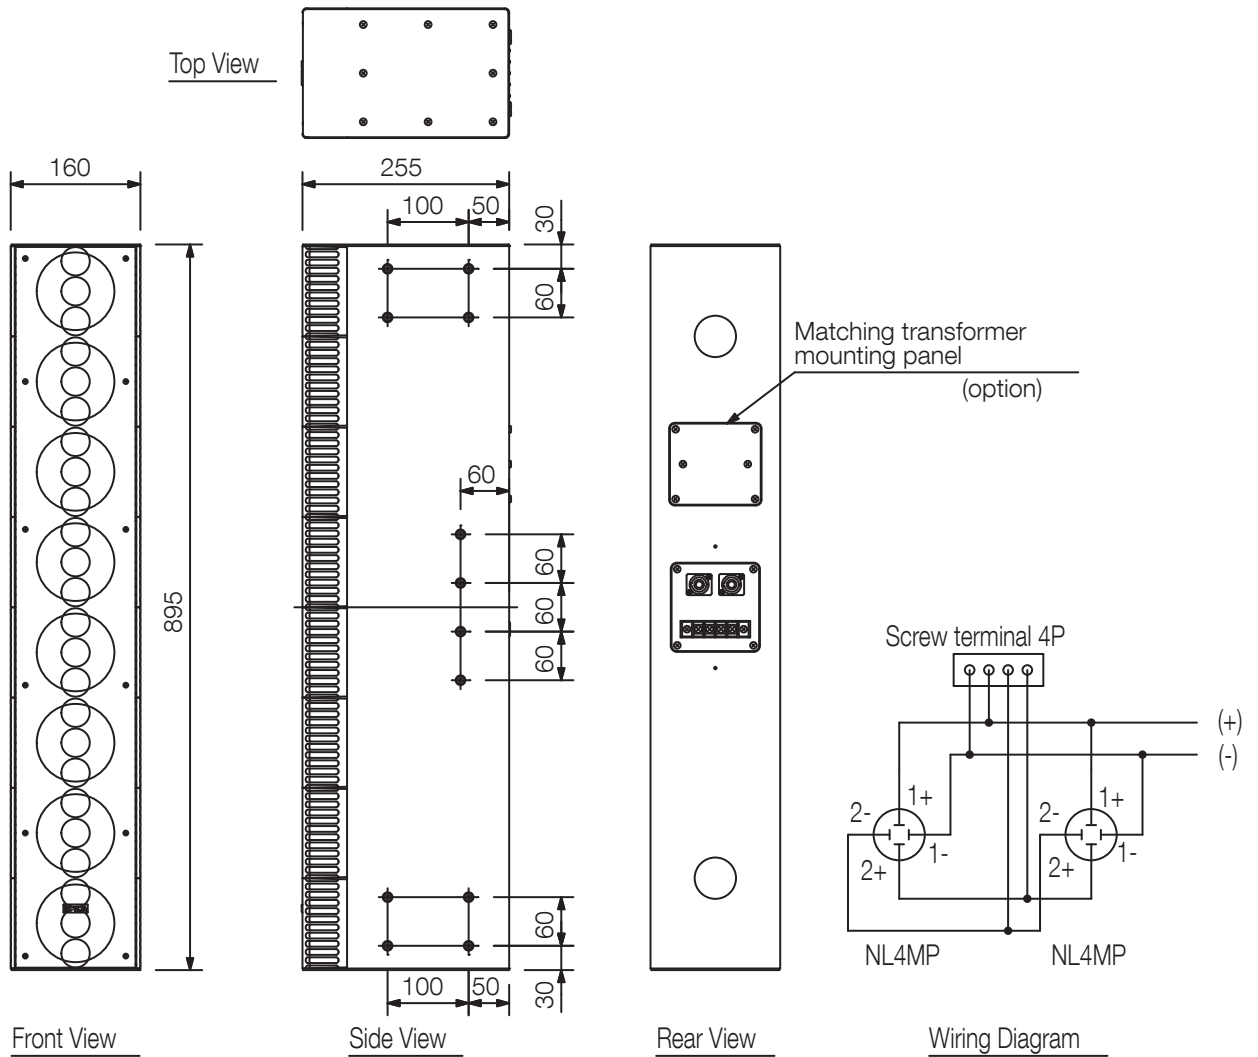

UNIT:mm SCALE:1/10