




## DESCRIPTION

The Metal column speaker TZ-30-EB is highly efficient compact speaker that deliver excellent sound performance in medium sized venues such as houses of worship, gymnasiums, auditoriums and more. The weatherproof range of TZ-30-EB metal column speaker has attained a rating of IP-55. They are capable of withstanding weather conditions in outdoor installations.

## SPECIFICATIONS


Rated Input	30W
Rated Impedance	100V line: 333Ω (30W) , 667Ω (15W) , 1.3kΩ (7.5W) 8Ω line: 8Ω (30W)
Sensitivity	90dB(1W,1m)
Frequency Response	150-20kHz (-20dB)
Speaker Component	5.3cm (2") ×4pcs cone-type, 5.1cm (2") ×1pcs cone-type
Dust/Water Protection	IP55
Applicable Cable	Solid copper wire: Ø0.8-Ø1.6mm (equivalent to AWG 20-14) 7-core twisted copper wire: 0.75-1.25mm <sup>2</sup> (equivalent to AWG 18-16 )
Connection	Screw terminal
Operating Temperature	-20°C to +55°C (-4°F to 131°F)
Finish	Enclosure: Aluminum,White(RAL9016 or equivalent) Front grille: Aluminum net,White(RAL9016 or equivalent)
Dimensions	403(H)×74.5(W)×69(D)mm(15.87"×2.93"×2.72")
Weight	1.74kg(3.84lb)
Accessory	Cable Grandx2      Rubber washerx2      Hexagon wrenchx1 Rubber gasketx2      L-type bracketx2      Bracket mounting screwx2

## APPEARANCE

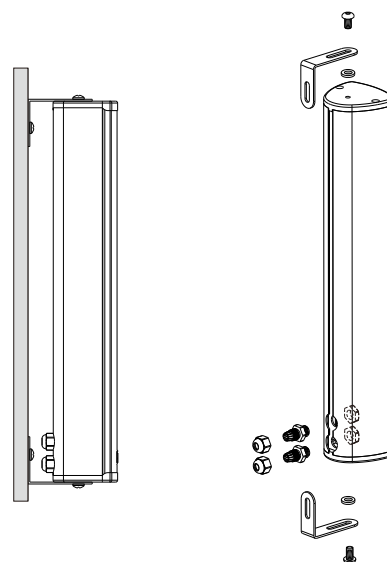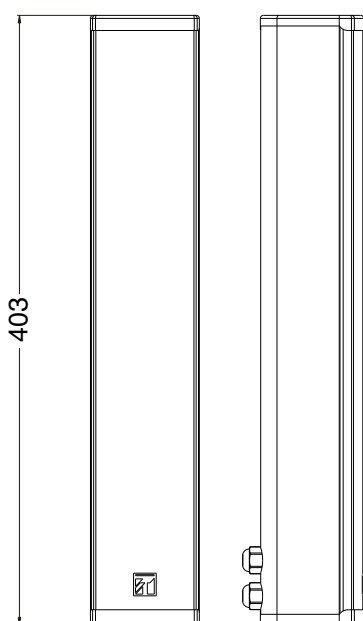

Installation drawing  
SCALE:1/8

### Wiring diagram

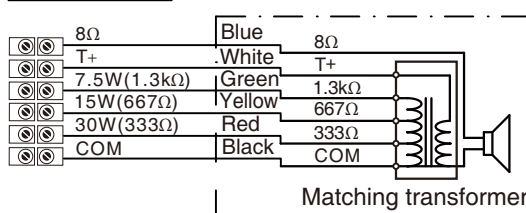

UNIT: mm SCALE:1/5