


The EOL module VX-300SV-EB comes in an IP65 rated box with a cable gland. Internally it provides a thermal fuse and a ceramic terminal to prevent the speaker line from a short circuit in case of fire. The terminal provides connecting the speaker line and the control wire. The 3-wire EOL-system is certified together with the VX-3000 system.

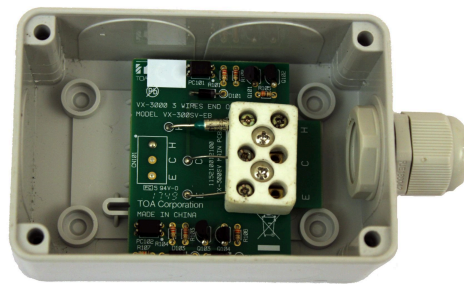

Article number: VX-300SV-EB

Specifications

Power source	from speaker line
Control output	Speaker line fault
Connection	3-pin ceramic screw terminal
Dimensions (W x H x D)	137 x 57 x 79 mm
Dimensions (ø x D)	x 79 mm
Finish	ASA resin, light grey (RAL 7035 or equivalent),
Operating humidity	90% or less
Operating temperature	-5°C to +45°C



VX-300SV

Appearance