

# WM-5225 D01

WIRELESS MICROPHONE

The WM-5225 Wireless Microphone employs an electret condenser microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.



Article number: WM-5225 D01  
 Alternative products: WM-5265 D01,  
 WM-5270 D01


## Specifications

Power source	Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2
Battery life	10 h
Microphone type	Electret condenser
Directivity	Cardioid
Power source	Battery 1 AA size alkaline battery, 1.5 V or WB-2000-2
Frequency range	837 – 865 MHz
Selectable frequencies	64
Simultaneous channels	7
AF response	100 Hz - 15 kHz
RF output power	10 mW
Maximum SPL	126 dB
Finish	Resin, black,
Operating humidity	30% - 85%
Operating temperature	-10°C ... +50°C

# WM-5225 D01

WIRELESS MICROPHONE

Appearance

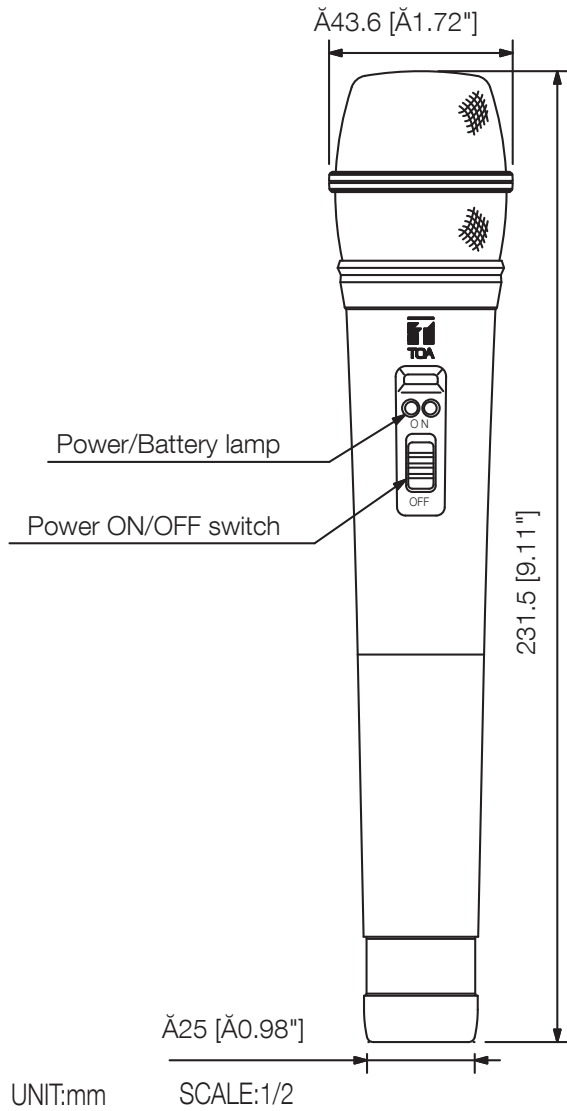

\*

Type	Frequency Range
A01	692 - 722 MHz, UHF
B01, B02	722 - 752 MHz, UHF
C01 - C07	794 - 830 MHz, UHF
D01 - D05	830 - 865 MHz, UHF
E01	668 - 698 MHz, UHF
F01	636 - 666 MHz, UHF
G01, G02	606 - 636 MHz, UHF
H01	576 - 606 MHz, UHF
K01	925 - 937.5 MHz, UHF

