




Article number:WP-700-EB

Specifications

Control keys, buttons and knobs	Control button: 1x Volume adjustment 1x Input source selection (1-4)
Control keys, buttons and knobs	Control button: 1x Volume adjustment 1x Input source selection (1-4)
Finish.	Steel plate, surface-treated, paint, white,
Operating temperature.	-10°C to +40°C

Appearance



REMOTE CONTROL PANEL

WP-700-AS

DESCRIPTION

The WP-700-AS is a remote control switch/volume panel that designed for MA-725F (or MM-700F) amplifiers, which can remote select input source and adjust volume level through Ethernet cable connected to MA-725F (or MM-700F) amplifier. Also it can be mounted in a 1-gang electrical box.


SPECIFICATIONS

Applicable Cable	CAT5/5e/6 STP cable
Control Operation	Input select switch x1, Volume control knob x1
Terminal	RJ-45 connector
Operation Temperature	-10°C to +40°C (14°F to 104°F)
Finish	Surface treated steel plate, white paint (RAL9016)
Dimension	72 (W) x 128 (H) x 60 (D)mm (2.83" x 5.04" x 2.36")
Weight	210g (0.463 lb)
Accessory	Box Mounting Screw: No. 6-32UNC x 30.....2 Panel Mounting Screw: No. 6-32UNC x 62


Note: Since no electrical box is supplied with the unit, prepare it separately.

APPEARANCE


[Front]




[Side]




[Rear]




[Front view without panel]




[Bottom]



[Figure when mounted]

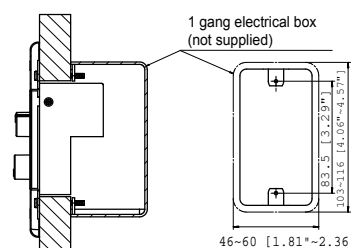

[Dimensions of mounting opening]



Unit: mm (Inch)

If the opening is too small or too large, the WP-700-AS cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.