

DESCRIPTION


The WT-5100 is a Portable Receiver designed to receive UHF band radio signals.
An optional earphone is required.

SPECIFICATIONS


Power Source	1.5 V DC (Battery)
Receiving Frequencies	576 – 865 MHz (*1), UHF
Channel Selectable	16 selectable frequencies
Receiving System	Double super-heterodyne
Receiving Sensitivity	Better than 60 dB Signal to Noise ratio (20 dB μ V input, \pm 40 kHz deviation)
Frequency Response	200 Hz – 5 kHz (Portable transmitter to Potable receiver)
De-emphasis	50 μ s
Output Level	4 mW (16 Ω load, 10 % distortion)
Battery	WB-2000 (WB-2000-2 contains 2 pieces) rechargeable battery (option) or LR6/AA alkaline dry cell battery
Battery Life	16 hours (when the WB-2000 rechargeable battery is used) 15 hours (when the alkaline battery is used)
Operation Temperature	-10 °C to +50 °C (14 °F to 122 °F) (except battery)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Resin, dark silver
Dimensions	62 (W) \times 163.6 (H) \times 32.5 (D) mm (2.44" \times 6.44" \times 1.28")
Weight	125 g (0.28 lb) (battery included)
Accessory	Neck strap...1
Option	Ni-MH battery: WB-2000-2 Ear-suspension earphone: YP-E401, Assist earphone: YP-E5000

* When using an earphone not made by TOA, use the one with a 3.5 mm-diameter plug and impedance of over 16 Ω .


APPEARANCE

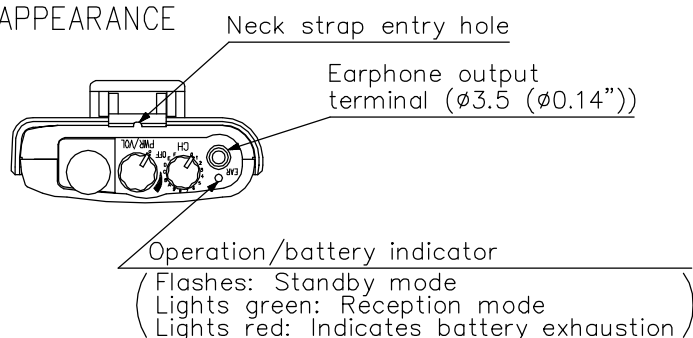

Top View

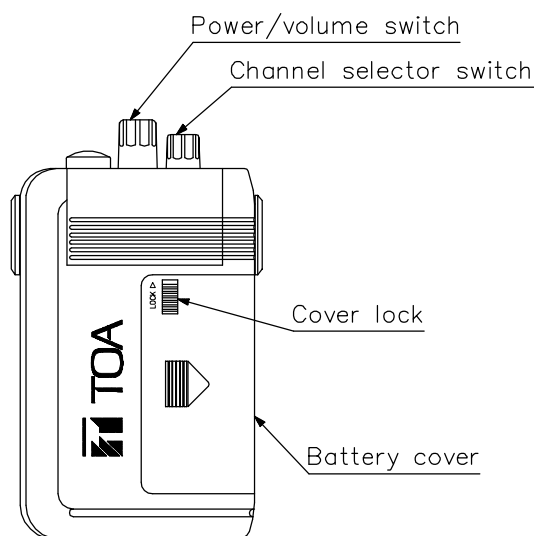


Front View

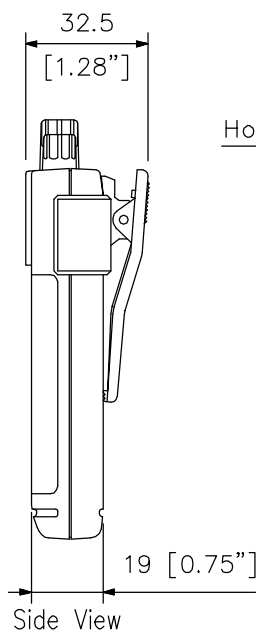

Side View

(*1)

Version	Receiving Frequency
A01	692 – 722 MHz, UHF
B01, B02	722 – 752 MHz, UHF
C01 – C07	794 – 830 MHz, UHF
D01 – D05	830 – 865 MHz, UHF
E01	668 – 698 MHz, UHF
F01	636 – 666 MHz, UHF
G01, G02	606 – 636 MHz, UHF
H01	576 – 606 MHz, UHF

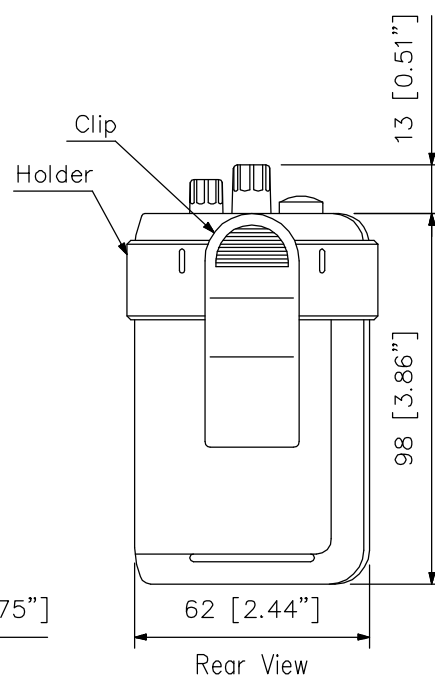

Rear View

UNIT: mm SCALE: 1/2