

DESCRIPTION


The A-230 is a power amplifier well-suited for broadcasting paging and supplying background music in restaurants, pubs, shops, houses of worship and so on.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	240 V AC, 50 Hz
Rated Output	30 W
Power Consumption	34 W (AC operation at EN60065)
Frequency Response	50 Hz – 20 kHz
Distortion	1 % or less at 1 kHz, 1/3 rated power
Input	MIC 1: -60 dB* (1.0 mV), 600 Ω, Unbalanced, Equivalent to 5-pin DIN Type MIC 2: -60 dB* (1.0 mV), 600 Ω, Unbalanced, Equivalent to phone jack Type AUX 1, 2: -20 dB* (100 mV), 10 kΩ, unbalanced, RCA pin jack
Output	Speaker out: Floating balanced High impedance: 330 Ω (100 V) Low impedance: 4 Ω (11 V)
Signal to Noise Ratio	60 dB or more (MIC 1, 2) 70 dB or more (AUX 1, 2)
Tone Control	Bass: -10 dB at 100 Hz Treble: -10 dB at 10 kHz
Muting	MIC 1 overrides other Mic input and AUX inputs with 0 – 30 dB attenuation, attenuation by switch
Indicator	Power LED, Signal LED
Operating Temperature	-10 °C to +40 °C (14 °F to 104 °F)
Finish	Panel: ABS resin, black, hairline Case: Steel plate, black, paint
Dimensions	350 (W) × 105 (H) × 240 (D) mm (13.78" × 4.13" × 9.45")
Weight	3.5 kg (7.72 lb)

APPEARANCE

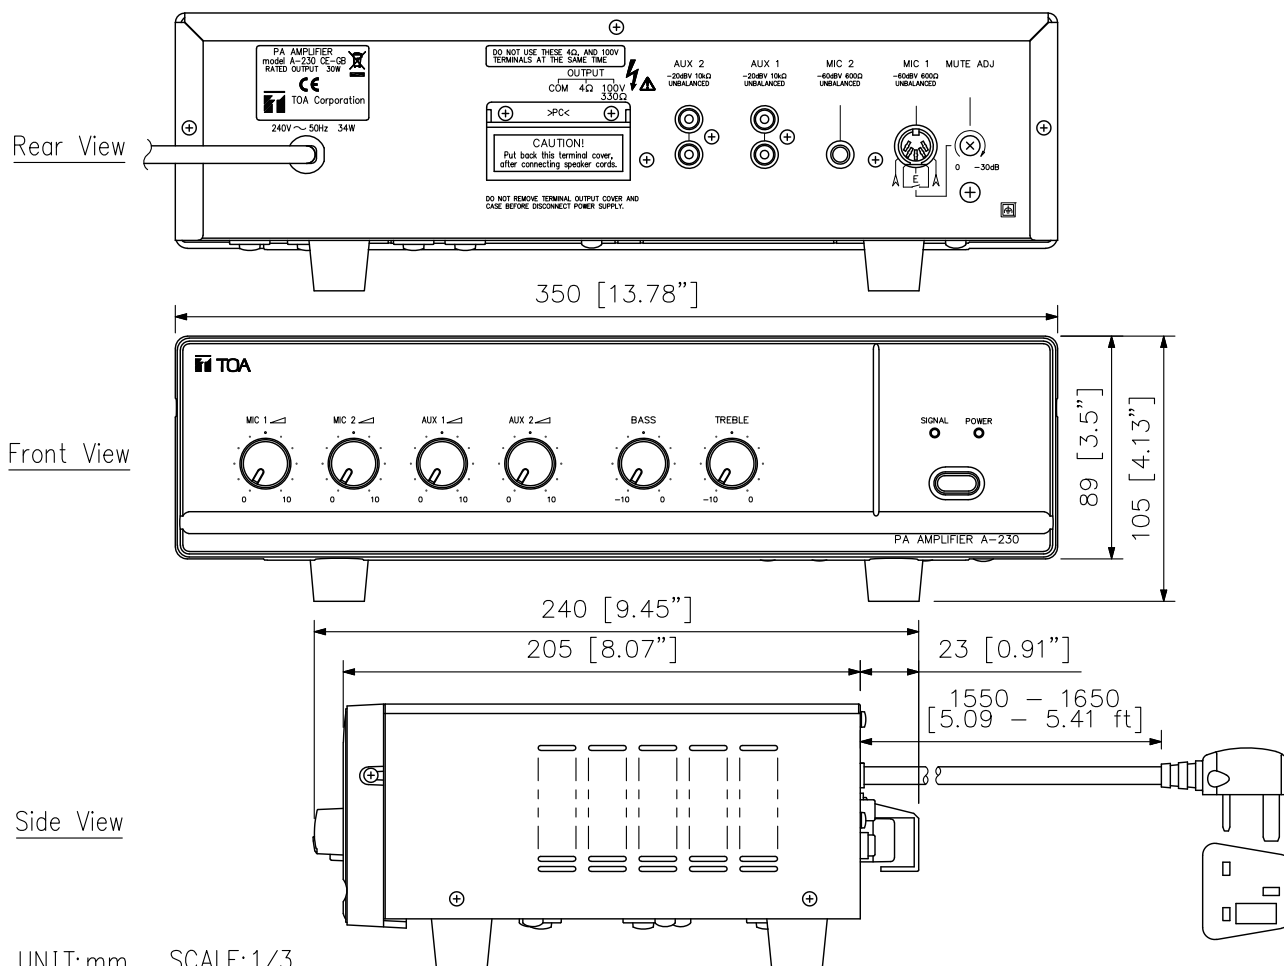

UNIT:mm SCALE:1/3