

ER-1206S — компактный мегафон с защитой от брызг, рассчитанный на выход 6 Вт, с встроенной сиреной. Он имеет водостойкие конструкции рейтинга IPX5. При нажатии кнопки сирены начинает звучать сирена, которая предупреждает людей о чрезвычайной ситуации. Он работает с 6 батареями R6P или 4 батареями R6P, когда используется переключатель батареи (дополнительно).




Номер статьи: ER-1206S EU  
Alternative products: ER-1206, ER-1206S,  
ER-1206W

### Specifications

Источник питания	R6P (AA) x 6 (9 В постоянного тока) или R6P (AA) x 4 (6 В постоянного тока)
Номинальная мощность	6 W (макс. 10 Вт)
Частотный отклик	450 Hz - 6 kHz (SPL -20 dB)
Срок службы батареи	8 h at 9 VDC, 5 h at 6 VDC
Сигнал работы батареи	20 min at 9 VDC, 10 min. at 6 VDC
Сигналы	Сирена
Звуковой диапазон	Речевой сигнал: 250 м
Размеры (Ш x В x Г)	154 x 266 x 250 mm
Размеры (ø x Г)	x 250
Покрытие	Полимер ASA, прозрачный красный, темно-красный,
Рабочая температура	от -10 °C до +40 °C

### Appearance

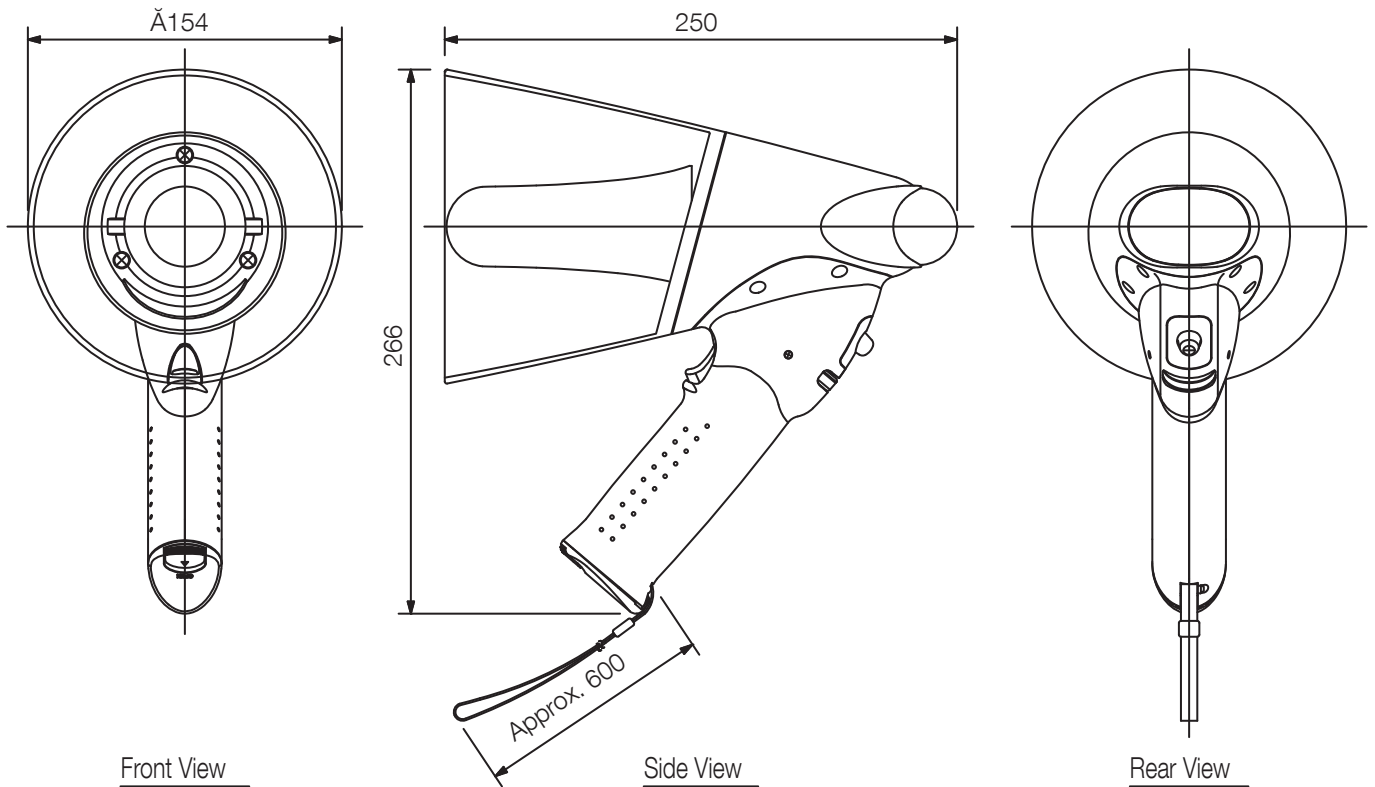

Front View

Side View

Rear View

<Note on the audible range and battery life>

1. The indications of the audible range and battery life are based on the JEITA Standard(\*1).
2. Audible Range presumes that the megaphone employs new batteries and is used on a quiet street.  
It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.
3. Battery Life assumes that megaphone is used for 30 minutes a day.

UNIT:mm

SCALE:1/4