

M-800DT DANTE MODULE

for M-8080D Matrix Mixer System

Connect up to 16 M-8080D **Matrix Mixer Systems**

Simply connect up to 16 x M-8080D Matrix Mixer Systems to extend your audio structure

The M-800DT Dante Module provides an easy-touse audio over ethernet connection between up to 16 M-8080D Matrix Mixer Systems. It expands the possibilities of the M-8080D system to a total of 192 Inputs and Outputs. Designed for exclusive use with the M-8080D, the M-800DT Dante Module provides a complete, ready-to-use Dante interface with up to 8 channels of bidirectional digital streaming.

The M-8080D Matrix Mixer System is ideal for multi-zone paging, music distribution and now also for decentralized applications.







\$ 0100


FEATURES

- Audio transmission and reception via ethernet
- Supports daisy chain or star connection and enables redundant network configuration
- Connecting up to 16 x M-8080D Matrix Mixer Systems, with up to 192 INPUTS and OUTPUTS,
- Ideal for systems with numerous zones/floors such as in large building complexes
 - Existing ethernet can be used



SPECIFICATIONS

	M-800DT
Power source	5 V DC (Powered by M-8080D)
Audio Codec	TDM, I2S
Digital audio i/F	Dante In: 8 channels, Out: 8 channels
Digital audio I/F	SPI Master and Slave
Network I/F	RGMII/MII
Operating temperature	0 °C to +40 °C (32 °F to 104 °F)
Dimensions	122.2 x 33.5 x 119.5 mm (W x H x D)
Finish	Steel plate, surface-treated, paint, black
Weight	0,118 kg

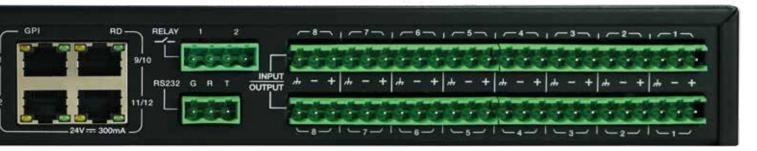





We supply sound, not equipment.

www.toa.eu

