



COLUMN SPEAKER

TZ-50-EB


DESCRIPTION

The Metal column speaker TZ-50-EB is highly efficient compact speaker that deliver excellent sound performance in medium sized venues such as houses of worship, gymnasiums, auditoriums and more. The weatherproof range of TZ-50-EB metal column speaker has attained a rating of IP-55. They are capable of withstanding weather conditions in outdoor installations.


SPECIFICATIONS

Rated Input	50W		
Rated Impedance	100V line: 200Ω (50W) , 400Ω (25W) , 800Ω (12.5W) 20Ω line: 20Ω (50W)		
Sensitivity	91dB(1W,1m)		
Frequency Response	150-20kHz (-20dB)		
Speaker Component	5.3cm (2") ×10pcs cone-type, 5.1cm (2") ×1pcs cone-type		
Dust/Water Protection	IP55		
Applicable Cable	Solid copper wire: Ø0.8-Ø1.6mm (equivalent to AWG 20-14) 7-core twisted copper wire: 0.75-1.25mm ² (equivalent to AWG 18-16)		
Connection	Screw terminal		
Operating Temperature	-20°C to +55°C (-4°F to 131°F)		
Finish	Enclosure: Aluminum,White(RAL9016 or equivalent) Front grille: Aluminum net,White(RAL9016 or equivalent)		
Dimensions	800(H)×74.5(W)×69(D)mm(31.50"×2.93"×2.72")		
Weight	3.3kg(7.28lb)		
Accessory	Cable Grandx2 Rubber gasketx2	Rubber washerx2 L-type bracketx2	Hexagon wrenchx1 Bracket mounting screwx2

APPEARANCE

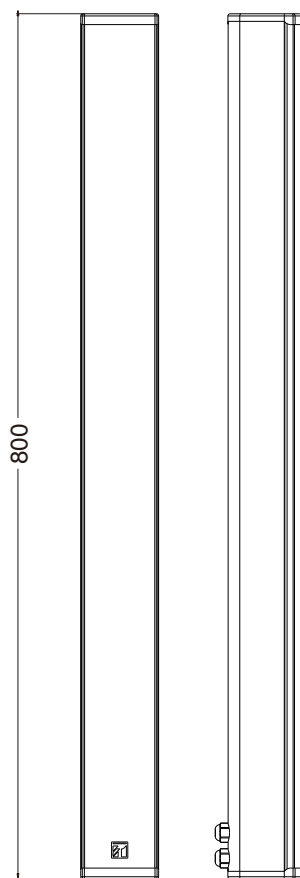

UNIT: mm SCALE:1/5

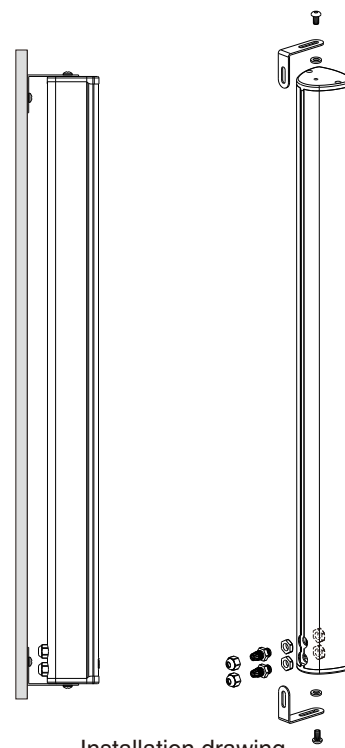

Wiring diagram

